

Fig.2
3UI 48 - 3UI 240


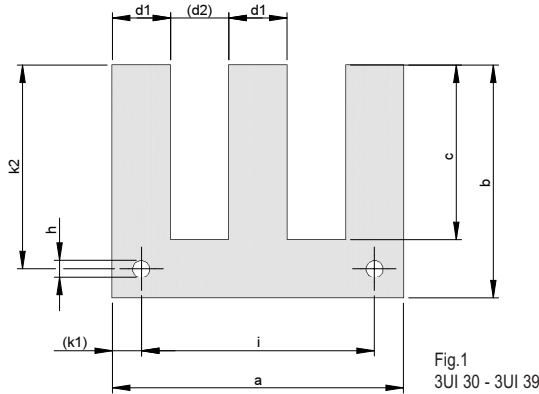


Fig.1
3UI 30 - 3UI 39



Nennmaß (mm)	Toleranz +/- 1/2 IT 12
Bereich	(mm)
≤ 3	+/- 0,050
> 3... 6	+/- 0,060
> 6... 10	+/- 0,075
> 10... 18	+/- 0,090
> 18... 30	+/- 0,105
> 30... 50	+/- 0,125
> 50... 80	+/- 0,150
> 80...120	+/- 0,175
> 120...180	+/- 0,200
> 180...250	+/- 0,230
> 250...315	+/- 0,260
> 315...400	+/- 0,285
> 400...500	+/- 0,315

Abmessungen / Dimensions Fig. 1+2

Typ/Bez.			a	b	c	d ₁	(d ₂)	h	i	(k ₁)	k ₂
3 UI	EI	IEC	±1/2 IT 12	±1/2 IT 12	±1/2 IT 12	±1/2 IT 12		JS 14	±1/2 IT 12		±1/2 IT 12
3 UI 30	EI 50/50	YUI 2-10	50	40	30	10	10	3,5	40	5	35
3 UI 39	EI 65/65	YUI 2-13	65	52	39	13	13	3,5	52	6,5	45,5
3 UI 48	EI 80/80	YUI 2-16	80	64	48	16	16	4,5	64	8	56
3 UI 60	EI 100/100	YUI 2-20	100	80	60	20	20	4,5	80	10	70
3 UI 75	EI 125/125	YUI 2-25	125	100	75	25	25	5,5	100	12,5	87,5
3 UI 90	EI 150/150	YUI 2-30	150	120	90	30	30	7,8	120	15	105
3 UI 102 *	EI 170/170	YUI 2-34	170	136	102	34	34	8,5	136	17	119
3 UI 105 *	EI 175/175	-	175	140	105	35	35	8,5	140	17,5	122,5
3 UI 114	EI 190/190	YUI 2-38	190	152	114	38	38	11	152	19	133
3 UI 120 *	EI 200/200	-	200	160	120	40	40	11	160	20	140
3 UI 132	EI 220/220	YUI 2-44	220	176	132	44	44	11	176	22	154
3 UI 150	EI 250/250	YUI 2-50	250	200	150	50	50	11	200	25	175
3 UI 168	EI 280/280	YUI 2-56	280	224	168	56	56	11	224	28	196
3 UI 180	EI 300/300	YUI 2-60	300	240	180	60	60	11	240	30	210
3 UI 210	EI 350/350	YUI 2-70	350	280	210	70	70	15	280	35	245
3 UI 240	EI 400/400	YUI 2-80	400	320	240	80	80	15	320	40	280

Gewicht / Weight kg/1.000	
0,5 mm	0,35 mm
7,2	5,0
12,3	8,5
18,7	12,8
29,3	20,1
45,7	31,4
65,7	45,1
84,5	58,0
89,5	61,4
105,1	72,1
116,6	80,1
141,4	97,0
183,0	125,6
230,0	157,8
264,3	181,3
466,0	324,0
726,5	505,2

* = nicht genormt nach DIN EN 60740-1 / not standardized to DIN EN 60740-1

3 UI 30, 39, 48 auch ohne Loch lieferbar / 3 UI 30, 39, 48 can be delivered without holes